



Evaluating the Efficacy of Sand Filtration for Greywater Treatment: Impact of Column Length on Water Quality and Irrigation Suitability

**Karan Sathish ^{a*}, C Vairavan ^b, A Kokila ^c,
Chethan Kumar K B ^d, Tharun Kumar C J ^e, Shankar M ^f,
Moorthy A V ^g and V Kousalya ^c**

^a Department of Environmental Sciences, College of Basic Science & Humanities, G. B. Pant University of Agriculture and Technology, Pantnagar, Uttarakhand-263 145, India.

^b Department of Soil Science, Mahatma Phule Krishi Vidyapeeth, Rahuri, Maharashtra- 413 722, India.

^c Department of Forestry and Environmental Science, University of Agricultural Sciences, Bangalore, Karnataka-560 065, India.

^d Department of Plant Genetic Resources, ICAR-IARI, New Delhi-110012, India.

^e Division of Molecular Biology and Biotechnology, ICAR - Indian Agricultural Research Institute, Pusa, New Delhi – 110012, India.

^f Division of Plant Genetic Resources, School of Graduate Studies, Indian Council of Agricultural Research (ICAR) - Indian Agricultural Research Institute (IARI), New Delhi-110012, India.

^g Department of Entomology, G. B. Pant University of Agriculture and Technology, Pantnagar, Uttarakhand-263 145, India.

Authors' contributions

This work was carried out in collaboration among all authors. Author KS conceptualized, did the methodology, did data curation, did the investigation, did the formal analysis, wrote original draft. Author CV conceptualized, did the investigation, wrote original draft. Author AK did the visualization, wrote, reviewed and edited the manuscript. Author VK did the software, wrote, reviewed and edited the manuscript. All authors read and approved the final manuscript.

Article Information

DOI: <https://doi.org/10.9734/ijecc/2024/v14i94403>

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/122444>

*Corresponding author: E-mail: karansathish555@gmail.com;

ABSTRACT

Aims: This study explores the efficacy of sand filtration in treating greywater (GW) collected from a hostel.

Methodology: An experimental setup was designed using five connected polyvinyl chloride (PVC) pipes filled with sand sourced from the Cauvery River. The GW was filtered through sand columns of varying lengths (40 ft, 60 ft, 80 ft, and 100 ft), with the filtered water analyzed for various physio-chemical parameters.

Results: The results indicate that sand filtration significantly reduces the levels of total suspended solids (TSS), electrical conductivity (EC), and other anions and cations, including chloride (Cl^-), sulphate (SO_4^{2-}), and sodium (Na^+). The pH of the untreated GW was initially alkaline but was reduced to near-neutral levels after treatment with the 100 ft sand column. Key water quality indices such as Sodium Adsorption Ratio (SAR), Sodium Ratio (SR), and Soluble Sodium Percentage (SSP) were within safe limits post-treatment, making the filtered GW suitable for irrigation.

Conclusion: The study concludes that sand filtration is an effective method for treating GW, particularly when longer sand columns are used, though further research is needed to optimize the filtration process for specific contaminants.

Keywords: Greywater treatment; sand filtration; water quality indices; irrigation water; column Filtration length.

1. INTRODUCTION

The need for water is growing daily because of increased industrialization, population growth, climate change, and the careless use of available water supplies. Ninety-seven percent of Earth's total water resources are contained in the oceans, with the remaining three percent accessible for direct use. Of this three percent, just one hundredth of the water is thought to be available for human use [1]. In most regions of the world, water scarcity is one of the most serious and noticeable threats to environmental integrity and public health. Using innovative methods for wastewater recycling, it is possible to promote sustainable development and safeguard the quantity and quality of water bodies while addressing the growing demands on this limited and essential resource [2].

There are two categories of waste water: the first is known as "Blackwater" and comprises the water that is released from toilets. It is high in pathogens. In addition to nitrogen and phosphorus, it also has a high concentration of organic matter [3]. The second kind is known as "grey water (GW)" which is water collected from the sewage discharge of sinks, bathtubs, showers, and clothes washers. It gets its name from the fact that when it is left for a long time, its

colour changes to grey [4]. More than 60% of all domestic wastewater originates from GW running from showers, washing machines and bathroom sinks. This suggests that GW is a desirable resource for irrigation if managed responsibly and in accordance with environmental guidelines. Grey water is an additional source that should be used in addition to the total amount of water used in this water crisis scenario [5]. Various water-demanding activities, such as agriculture, gardening, landscape irrigation, golf courses, fire suppression, air conditioning, soil compaction, building, toilet flushing, and public park irrigation, can be accomplished with recycled GW [6].

According to Vengeswaran and Sundaravadivel [7], the main concerns regarding GW reuse have been related to public health attitudes and the deployment of inadequate technology for the reuse option. Numerous scholars have examined the features of GW in relation to fixtures, lifestyle choices, and settlement types [8]. Thus, a low-cost technique for GW treatment was tried to restore the depleting water supplies for future sustainability, which can then lessen the extraction of groundwater.

There are numerous methods and tools available for treating water. Depending on the rate of pollution or the location, these methods may

vary. But the fundamentals remain the same. Numerous water treatment methods, including sedimentation, filtration, disinfection, fluoridation, etc., might be mentioned. However, the focus of this work is on filtration, more especially "slow sand filtration (SSF)". This procedure is acknowledged as a viable filtration technology for eliminating organics, water-borne pathogens, and lowering turbidity [9]. It is also recognized as a good technology for all forms of wastewater treatment in rural regions. A sand medium is used in an SSF system's filtration process, which removes impurities from the water by allowing it to percolate through a variety of physical, chemical, and biological processes. Since then, this method has been extensively employed to produce drinking water as well as to enhance the quality of wastewater prior to its reuse or release into the environment.

Therefore, our research encompasses the following three objectives: 1. To evaluate the effectiveness of sand filtration in reducing physio-chemical parameters in GW. 2. To investigate the impact of varying sand column lengths on GW quality improvement. 3. To assess the suitability of sand-filtered GW for irrigation based on key water quality indices.

2. MATERIALS AND METHODS

Soil column setup: The experimental study consists of five opaque Polyvinyl chloride (PVC) pipes with internal diameter of 15 cm (6 inches) and a length of 6.096 m (20 feet (ft)). The five pipes were connected to make a 100ft length and kept in a horizontal position (by giving wooden support from the ground level) with a slight slope in order to filter the waste water through sand medium. Sand was collected from the Cauvery

River bank which is in Thanjavur city. For column experiment the sand passing through 4.75 mm and retained on 600µ IS sieve were used. The PVC pipe was filled with sand and ensure that no empty space should be noticed and outlet valve was fitted at the bottom and iron sheet fixed inside the valve.

Sample collection: The studies were executed in a Dr. M.S. Swaminathan Agricultural College and Research Institute, Thanjavur, India. For experiment purposes, the Greywater (GW) was collected from the boy's hostel at same campus. The GW from the hostel is collected in a tank and passed through the sand filter with height of 40ft, 60ft, 80ft and 100ft at the inlet side and the filtered water is drained at the outlet and collected in a clean sampling bottle. The same process is repeated for sand filters of different heights with three replications. The filtered GW sample is collected and labeled by height of the filter medium for further water quality analysis.

Sample analysis: The pH of the raw GW sample was measured using a pH meter (Fisher Scientific Accumet Basic AB15), which was first calibrated with pH 4 and 7 solutions [10]. Electrical conductivity (EC) was determined using a Systronic conductivity meter with an operating at 27°C [11]. Total suspended solids (TSS) were measured by the method described by Baruah and Barthakur [11]. The chloride (Cl⁻) content of untreated and treated water samples was analyzed by precipitating chloride as silver chloride through titration with standard silver nitrate in the presence of potassium chromate [12]. Sulphate (SO₄²⁻) was estimated by Turbidometric method based on precipitated as barium sulfate by adding barium chloride with gum acacia at pH 4.8, maintained by a sodium

List 1. Quality parameter formula

Quality parameter	Formula
Sodium Ratio (SR)	$SR = \frac{Na^+}{Ca^{2+} + Mg^{2+}}$
Sodium Adsorption Ratio (SAR)	$SAR = \frac{Na^+}{\sqrt{\frac{Ca^{2+} + Mg^{2+}}{2}}}$
Soluble Sodium Percentage (SSP)	$SSP = \frac{Na^+}{Ca^{2+} + Mg^{2+} + Na^+ + K^+} * 100$
Permeability Index (PI)	$PI = \frac{Na^+ + \sqrt{HCO_3^-}}{Ca^{2+} + Mg^{2+} + Na^+} * 100$

acetate-acetic acid buffer [11]. The Carbonate (CO_3^{2-}) and Bicarbonate (HCO_3^-) determined by titrating the solution with standard sulphuric acid using phenolphthalein indicator [11]. The major cations Sodium (Na^+), Potassium (K^+), Calcium (Ca^{2+}) and magnesium (Mg^{2+}) were analyzed in ion chromatography using American Standard Test Method D 6919-17 [13]. Sodium Ratio (SR), Sodium Adsorption Ratio (SAR), Soluble Sodium Percentage (SSP), and Permeability Index (PI) calculated based on following empirical formula,

Statistical analysis: Statistical test of mean for the replicated water quality parameters and Tukey HSD test at the 0.05 level (95 %) conducted using Origin (Pro) software, 2024, produced by Origin Lab Corporation, Northampton, MA, USA.

3. RESULTS AND DISCUSSION

The physical and chemical properties of untreated and treated GW samples at different sand column filter length represented in Table 1.

Physical parameters: Electrical conductivity (EC) measures water's ability to transmit electric current, influenced by dissolved ions and temperature, with higher EC indicating more ions and total solids [14]. In this study, untreated water with an EC of 0.767 dS/m, considered highly saline, was reduced to 0.338 dS/m after treatment with a sand filter at 100 ft length, lowering its salinity. High EC content of untreated GW due to bathing and washing activities in hostel. Total suspended solids (TSS) consist of fine particles like microorganisms, algae, mineral particles, and organic matter suspended in water. Untreated GW, identified as highly hazardous due to its high soluble salt content (1350 mg/L), showed decreasing hazard levels at depths of 40, 60, and 80 ft, reaching a low hazard condition at 100 ft (400 mg/L). The relatively high levels of TSS in GW, much of which originates from the kitchen and laundry, may be attributed to washing activities. These include cleaning clothes, shoes, all of which can introduce sand, clay, and other materials that contribute to increased TSS [15]. The reduction of TSS and EC after sand filtration due to coarse particles aid in the removal of TSS, while fine particles are effective at removing ions through adsorption and ion exchange mechanisms [16].

Chemical parameters: pH measures the concentration of hydrogen and hydroxyl ions in water, indicating its acidic, neutral, or basic

nature on a scale from 1 to 14. In this study, untreated GW with a pH of 8.78, initially strongly alkaline, was reduced to 7.76, becoming mildly alkaline after treatment with a 100 ft sand column. Sample at 40, 60, 80 ft are moderately alkaline. According to Rakesh et al. [17], Most of the samples tended to be alkaline due to the presence of alkaline substances, such as sodium hydroxide, commonly found in detergents. The main chemical components in GW were identified as byproducts of these detergents, which contain surfactants that serve as the primary active agents in most cleaning products.

All samples showed chloride (Cl^-) levels below the toxic threshold. The untreated samples contain 85.2 mg/L Cl^- and it reduced to 21.3 mg/L at 100 ft column length. Since the Cl^- levels in the GW samples were found to be significantly low, the likelihood of infection may be higher. Cl^- acts as a strong disinfectant, so lower concentrations correlate with higher infection risks [18]. All samples had sulphate (SO_4^{2-}) content below the toxic level, indicating normal sulphate levels. However, treatment with a sand filter further reduced the sulphate concentration from 62.5 mg/L to 7.5 mg/L. Braga et al. [19] reported as, the low SO_4^{2-} levels observed might be attributed to the reduced use of sodium lauryl sulfate, a common surfactant in cleaning products, cosmetics, and personal care items. There was a low carbonate content in the untreated and treated GW sample. Carbonate in untreated GW 0.23 mg/L and 0.06 mg/L in 100 ft sand column. The bicarbonate level of all the samples is under safe condition. High bicarbonate reported in untreated GW (463.6 mg/L) and content decreased with increased in sand column length. Lowest (353.8 mg/L) in 100 ft sand column.

Water hardness is determined by the total concentrations of calcium (Ca) and magnesium (Mg). All samples initially had problematic Ca levels, but treatment with a sand column reduced the toxic Ca level from 64 mg/L to 32 mg/L at 100 ft sand column. While the Mg content in untreated samples (28.8 mg/L) and those at 40 (71 mg/L) and 60 ft (63.9 mg/L) depths was problematic, it was within normal limits at 80 (35.5 mg/L) and 100 ft (21.3 mg/L). Chemical reactions that occur during the use of soaps and detergents can also lead to the precipitation of Ca and Mg compounds, which may then be washed away into the GW. All samples had sodium (Na) levels within normal limits, with the

Table 1. The physio-chemical properties of untreated and treated GW samples at different sand column filter length

Quality parameters	Sample				
	Untreated	40 ft	60 ft	80 ft	100 ft
pH	8.78±0.11	8.34±0.15	8.28±0.17	7.94±0.19	7.76±0.10
EC (dS/m)	0.767±0.02	0.658±0.02	0.423±0.02	0.345±0.01	0.338±0.01
TSS (mg/L)	1350±8.55	1020±2.65	970±5.55	700±4.57	400±7.70
Cl ⁻ (mg/L)	85.2±1.72	71±1.15	63.9±1.03	35.5±0.55	21.3±0.48
Ca ²⁺ (mg/L)	64±1.66	60.8±1.17	56±1.28	48±0.62	32±0.45
Mg ²⁺ (mg/L)	28.8±0.22	25.92±0.42	24±0.56	19.2±0.16	19.2±0.11
CO ₃ ²⁻ (mg/L)	0.23±0.01	0.19±0.01	0.13±0.01	0.10±0.01	0.06
HCO ₃ ⁻ (mg/L)	463.6±5.84	427±10.22	390.4±8.13	366±8.95	353.8±1.66
SO ₄ ²⁻ (mg/L)	62.5±1.47	40±0.21	37.5±0.10	18.5±0.22	7.5±0.12
Na ⁺ (mg/L)	65±0.97	54±0.22	48±0.30	39±0.51	29±0.66
K ⁺ (mg/L)	28±0.63	25±0.45	19±0.44	16±0.41	13±0.13

**Means of replicated data presented in mean ± SEM*

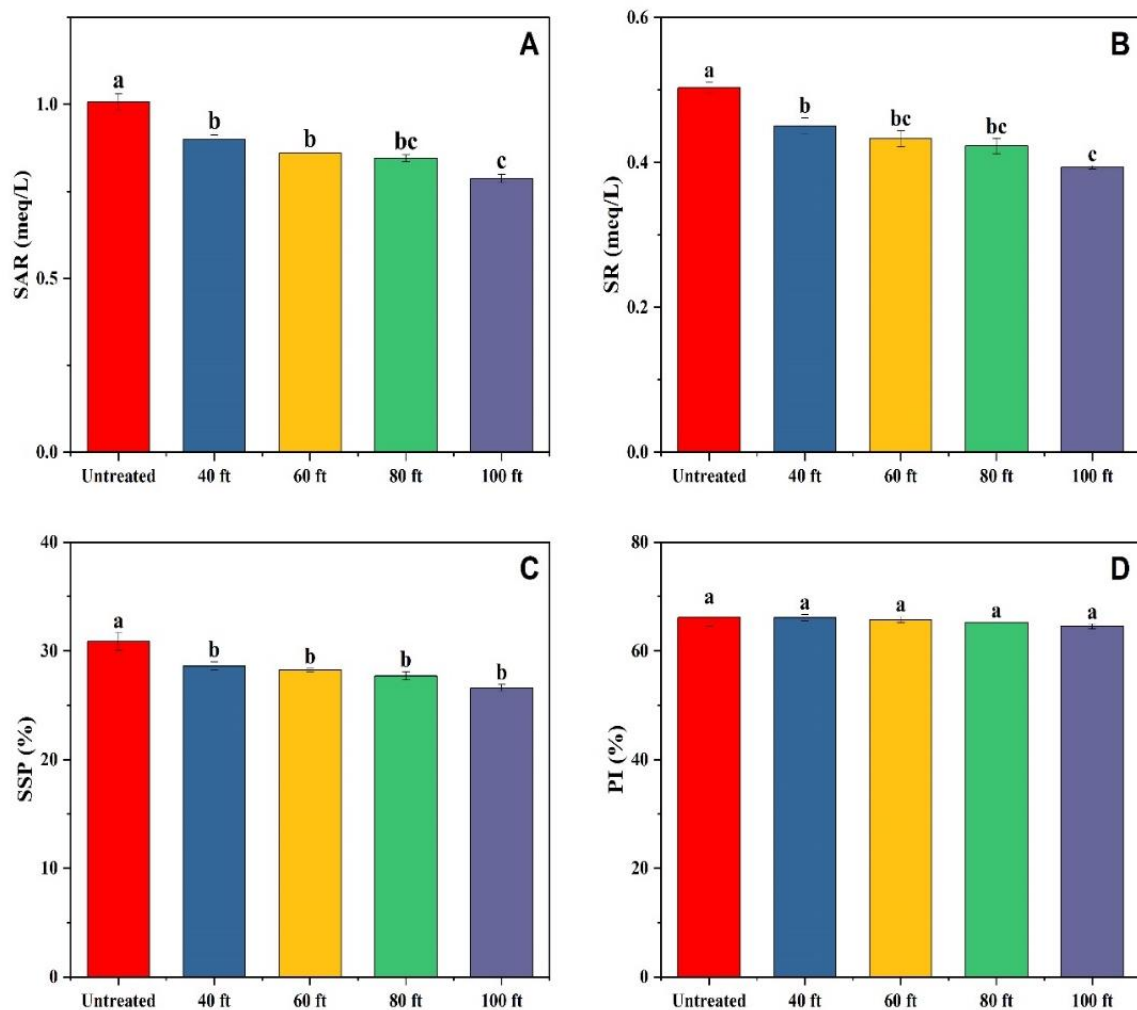


Fig. 1. A) Sodium Ratio (SR), B) Sodium Adsorption Ratio (SAR), C) Soluble Sodium Percentage (SSP), and D) Permeability Index (PI) of untreated and treated GW at different soil column length

raw water's Na concentration decreasing from 65 mg/L to 29 mg/L after treatment with a 100 ft sand filter. Na-based soaps also contribute significant quantity of Na into GW. While the potassium (K) levels in the raw water (28 mg/L) and at 40 ft (25 mg/L) were slightly problematic, they were within normal limits at 60 (19 mg/L), 80 (16 mg/L), and 100 ft (13mg/L) depths. High levels of cations in GW result from the use of hostel cleaning products, laundry practices, chemical additives, and bathing activities. These factors collectively contribute to the mineral composition of GW, making it rich in various cations.

Sand filtration can effectively remove certain anions and cations from water by physical adsorption and absorption, although its efficiency varies depending on the specific ion and the filter design. Increased bed length enhanced water decontamination efficiency by providing additional adsorption sites for physical and chemical pollutants [20]. Slower filtration rates allow more time for adsorption and ion exchange processes to occur, improving removal of some ions [21].

Water quality indices: The water quality indices of untreated and treated GW samples represented in Fig. 1. The Sodium Adsorption Ratio (SAR) is used to estimate the likelihood of Na⁺ increasing its presence on exchange sites at the expense of other cations. Since all samples have an SAR of less than 10, they are classified as having a low sodium hazard, indicating no significant risk. The high SAR value in untreated GW (1 meq/L) and lowest in GW treated by 100 ft (0.787 meq/L) sand column. The sodium ratio of the untreated GW sample is 0.503 meq/L and the water treated at 100ft sand column has the sodium ratio of 0.393 meq/L, hence it is good. The excess of Na ions in water can classify it as saline or alkaline, depending on whether it is associated with chloride/sulfate or carbonate/bicarbonate ions. The quality of irrigation water is traditionally assessed based on Na levels using the Soluble Sodium Percentage (SSP). If SSP value exceeds 60%, water is considered unsuitable for irrigation [22]. In our experiment, the ranges from 30.86% in untreated GW to 26.6% in 100 ft sand column which is in safe condition.

High Na levels in irrigation water can lead to significant soil permeability issues. Permeability is influenced not only by Na but also by the presence of CO₃²⁻ and HCO₃⁻, which can

precipitate as CaCO₃ or MgCO₃, thereby reducing Ca and Mg in the water and increasing the proportion of Na. If permeability index (PI) value exceeds 65%, water is considered unsuitable for irrigation. Hence untreated sample, samples at 40ft, 60ft, 80ft are unsuitable for irrigation. But the sample treated at 100ft having the PI 64.5% (i.e., less than 65%), it is suitable to use as irrigation water. The treatment of GW in the 100ft sand filter column gives the best results by reducing the sodium content to the normal level [23].

4. CONCLUSION

This study investigated the efficacy of sand filtration in treating GW from hostel. The treatment of waste water in the 100ft sand filter column gives the best results by reducing the pH, EC, TSS and the hardness to the normal level. The toxicity level of the anions and cations like Cl⁻, SO₄²⁻, HCO₃⁻, Na⁺, K⁺ were also reduced to the normal level. The length and diameter of the sand column filtration determines the purity of water. Hence the treated GW can be used as irrigation water, since it has no toxicity which is evaluated by the irrigation water quality standards. The findings highlight the potential of sand filtration for GW treatment but emphasize the need for further research to optimize the process and address specific contaminant removal challenges.

DISCLAIMER (ARTIFICIAL INTELLIGENCE)

Author(s) hereby declare that NO generative AI technologies such as Large Language Models (ChatGPT, COPILOT, etc) and text-to-image generators have been used during writing or editing of manuscripts.

DATA AVAILABILITY STATEMENT

The data that support the findings of this study are available from the corresponding author upon reasonable request.

ACKNOWLEDGEMENTS

With a deep sense of pride and gratitude, I am thankful to the Dr. Mohan Dass for providing permission and facilities to conduct this study. I am also grateful to Miss. Vanitha for help in water sample analysis, which was instrumental in the completion of our research.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Eakins BW, Sharman GF. Volumes of the World's Oceans from ETOPO1. NOAA National Geophysical Data Center, Boulder, CO. 2010;7(1).
2. Pappalardo L, Jumean F, Abdo N. Removal of cadmium, copper, lead and nickel from aqueous solution by white, yellow and red United Arab Emirates sand. *American Journal of Environmental Sciences*. 2010;6(1):41.
3. Juma AI, AL-Shamary SH, Hassan ZA, AL-Hadithy AH. Using of grey water and treated wastewater in irrigation and its effect on some soil properties and Cassia Fistula plant growth. 3rd International Scientific Conference / College of Education for Girls/ Al-Kufa University; 2018.
4. Nolde E. Greywater reuse systems for toilet flushing in multi-storey buildings—over ten years experience in Berlin. *Urban water*. 2000;1(4):275-284.
5. Packialakshmi S, Balaji S, Kumaresan T. Inducing recharge of groundwater by treated waste water—a pilot study in Southern Chennai Metropolitan Area. *Indian Journal of Science and Technology*. 2015;8(11).
6. Emmerson G, Emmerson G. Every drop is precious: Greywater as an alternative water source. Queensland Parliamentary Library Publications and Resources Section; 1998.
7. Vigneswaran S, Sundaravadivel M. Recycle and reuse of domestic wastewater. *Wastewater recycle, reuse, and reclamation*. 2004;1.
8. Alsulaili AD, Hamoda MF. Quantification and characterization of greywater from schools. *Water Science and Technology*. 2015;72.
9. Guchi E. Review on slow sand filtration in removing microbial contamination and particles from drinking water. *American Journal of Food and Nutrition*. 2015; 3(2):47-55.
10. Jackson ML. Soil chemical analysis, pentice hall of India Pvt. Ltd., New Delhi, India. 1973;498:151-154.
11. Baruah TC, Barthakur HP. A text book of soil analysis. Vikas Publishing House, Pvt. Ltd. New Delhi; 1999.
12. AOAC. Association of official agricultural chemist Publication; 1950.
13. ASTM D. 6919-17; Standard test method for determination of dissolved alkali and alkaline earth cations and ammonium in water and wastewater by ion chromatography. ASTM International: West Conshohocken, PA, USA; 2017.
14. Dewangan SK, Shrivastava S, Kadri M, Saruta S, Yadav S, Minj N. Temperature effect on electrical conductivity (EC) & total dissolved solids (TDS) of water: A review. *Int. J. Res. Anal. Rev*. 2023;10:514-520.
15. Oteng-Peprah M, Acheampong MA, DeVries NK. Greywater characteristics, treatment systems, reuse strategies and user perception—A review. *Water, Air, & Soil Pollution*. 2018;229(8):255.
16. Chidambaram S, Ramanathan AL, Vasudevan S. Fluoride removal studies in water using natural materials. *Water Sa*. 2003;29(3):339-344.
17. Rakesh S, Ramesh PT, Murugaragavan R, Avudainayagam S, Karthikeyan S. Characterization and treatment of grey water: A review. *IJCS*. 2020;8(1):34-40.
18. Winward GP, Avery LM, Stephenson T, Jefferson B. Chlorine disinfection of grey water for reuse: effect of organics and particles. *Water research*. 2008;42(1-2):483-491.
19. Braga JK, Varesche MBA. Commercial laundry water characterisation. *American Journal of Analytical Chemistry*; 2014.
20. Barkouch Y, Flata K, Melloul AA, Khadiri ME, Pineau A. Study of filter height effect on removal efficiency of Cd, Cu, Pb and Zn from water by slow sand filtration. *Desalin. WATER Treat*. 2019;161:337-342.
21. Abdiyev K, Azat S, Kuldeyev E, Ybyraiymkul D, Kabdrakhmanova S, Berndtsson R, Khalkhabai B, Kabdrakhmanova A, Sultakhan S. Review of slow sand filtration for raw water treatment with potential application in less-developed countries. *Water*. 2023; 15(11):2007.

22. Khan TA, Abbasi MA. Synthesis of parameters used to check the suitability of water for irrigation purposes. International Journal of Environmental Sciences. 2013;3(6):2131-2138.
23. Adagba T, Kankara AI, Idris MA. Evaluation of groundwater suitability for irrigation purpose using gis and irrigation water quality indices. Fudma Journal of Sciences. 2022;6(2):63-80.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the publisher and/or the editor(s). This publisher and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

© Copyright (2024): Author(s). The licensee is the journal publisher. This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<https://www.sdiarticle5.com/review-history/122444>